


Order guide: Major category **D**, Series **KX**, Category **A**, Series **J**, Applicable shaft diameter **4**.  
 1 Material: Please refer to the series code to select the type and parameters for ordering.

Order guide: Major category **D**, Series **KX**, Category **B**, Specification **3**.  
 1 Specification: Please refer to the series code to select the type and parameters for ordering.

Bayonet pin

Code	Type	Material 1	Hardness	ST
AKXA-J	Bayonet pin	Spring steel	40-50HRC	Galvanized passivation
AKXA-S1		SUS304	—	—

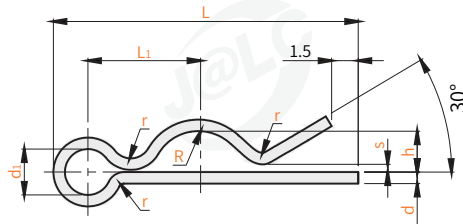


Code	Model		d	L	d1	L1	R	h	r	S (Max.)
	Applicable shaft diameter 2									
AKXA-J (SUS304) AKXA-S1	4	1	16.3	3	6	2	1	1.5	0.5	
	5	1.2	17.9	3.6	6.5	2.5	1.5	1.8	0.6	
	6	1.6	21.2	4.8	7.8	3	1.8	2.4	0.8	
	7*	1.8	22.8	5.4	8.3	3.5	2.3	2.7	0.9	
	8	2	27.7	6	10.4	4	2.4	3	1	
	9*	2	29.3	6	10.9	4.5	2.9	3	1	
	10	2	32.6	6	12.2	5	3.2	3	1	
	12	2	35.8	6	13.2	6	4.2	3	1	
	14	2	40.6	6	15	7	5	3	1	
	16	2	43.8	6	16	8	6	3	1	


\*Specifications with \* do not apply to AKXA-J

Shaft pin

Code	Type	Material	ST	Strength grade
AKXB	Shaft pin	SUS304	—	—



Applicable shaft



Code	Specification 3	Shaft pin size						Applicable shaft(Ref.)						
		d3		d		d4 (about)	V (about)	C (Max.)	L (about)	R	d1	d2	m	n (Min.)
AKXB	3	1.8	±0.2	0.6	±0.01	2.2	3	1	8.6	1.2	3	2.5	0.8	1.5
	4	2.7	0	0.7		1.4	2.9	1.9	7.8	1.4	4	3.2		
	5	3.6	-0.4	0.7		1.8	3.8	2.5	10.1	1.6	5	4.1	0.9	
	6	4.4		0.8		2.2	4.5	3.1	12	1.8	6	4.9	1	
	7	5.4		0.9	±0.02	2.7	5.3	3.8	14.1	2	7	5.9		
	8	6.3	-0.5	0.9		3.2	6.1	4.4	16.3	2.4	8	6.8	1.1	
	9	7.3		1		3.7	6.8	5.1	18.2	2.4	9	7.8		
	10	7.7	0	1		3.9	7.3	5.4	19.5	2.4	10	8.7	1.2	
	12	9.4	-0.7	1.2	±0.03	4.7	8.9	6.6	23.7	2.4	12	10.4	1.4	