Order guide

A (Major category) MF (Category) S- (Series) P5- (2 Hardness) A65- (1 Material) 3 (3 Specification)

◉ Please refer to the series code to select the type and parameters for ordering.

Code	Material 1	Hardness(Shore) 2	Color	Operating temperature range	State	Use
AMFS-P5-A65	Nitrile rubber	65HA $^{+10}_{0}$	Black	-20~100 °C	Fixed	Mineral oil resistant
AMFS-P5-A85		85HA $^{+10}_{0}$		-15~100 °C		
AMFS-P6-A45	Silicone rubber	45HA $^{+10}_{0}$	Milky white	-40~200°C		For high temperature resistance
AMFS-P6-A65		65HA $^{+10}_{0}$	Reddish brown			
AMFS-P7-A65	Fluororubber		Black	-10~200 °C		
AMFS-P7-A85		85HA $^{+10}_{0}$				

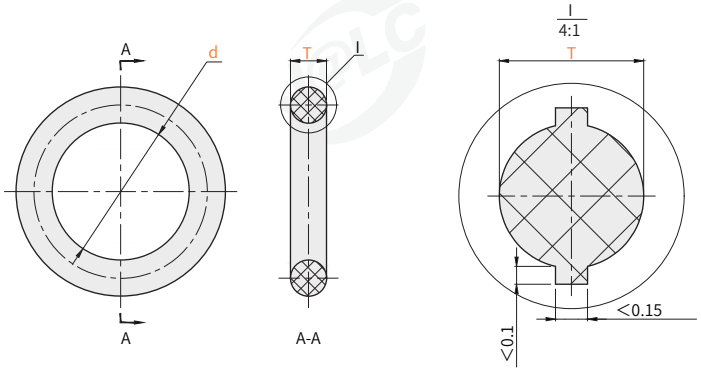

Perspective standard: first perspective

Model		T	d				Matching size			
Code	Specification 3		Size	AMFS-P 5	AMFS-P 6	AMFS-P7	d		D	
	3		2.5				3		5	
	4		3.5				4		6	
	5		4.5				5		7	
	6		5.5				6		8	
	7		6.5				7		9	
	8		7.5				8		10	
	9		8.5				9		11	
	10		9.5				10		12	
	11.2	1.5 ± 0.09	10.7				11.2		13.2	
	12		11.5				12		14	
	12.5		12.0				12.5		14.5	
	14		13.5				14		16	
	15		14.5				15		17	
	16		15.5				16		18	
	18		17.5				18		20	
	20		19.5				20		22	
AMFS-P5-A65	22		21.5	± 0.14	± 0.44	± 0.29	22		24	
AMFS-P5-A85	22.4		21.9				22.4		25.4	
AMFS-P6-A45	24		23.5				24		27	
AMFS-P6-A65	25		24.5				25	$^{0}_{-0.05}$	28	$^{+0.05}_{0}$
AMFS-P7-A65	26		25.5				26		29	
AMFS-P7-A85	28		27.5				28		31	
	29		28.5				29		32	
	30		29.5				30		33	
	31.5		31.0				31.5		34.5	
	32		31.5				32		35	
	34		33.5				34		37	
	35	2.0 ± 0.09	34.5				35		37	
	35.5		35.0				35.5		38.5	
	36		35.5				36		39	
	38		37.5				38		41	
	39		38.5				39		42	
	40		39.5				40		43	
	42		41.5				42		45	
	44		43.5				44		47	
	45		44.5	± 0.24	± 0.74	± 0.49	45		48	
	46		45.5				46		49	
	48		47.5				48		51	
	50		49.5				50		53	