Order guide

B	KL	R-	Q	- F38	- R55	- N10	- BKTR
Major category	Series	❷Inner width		❹Number of chain links			
Drag chain	❶Crossbeam	❸Bending radius		❺Joint			

Please refer to the series code to select the type and parameters for ordering.

B	KT	R-	F38
Major category	Series		
Joint	❷Inner width		

Please refer to the series code to select the type and parameters for ordering.

B	KF	R -	Q
Major category	Series		
Shim	❶Crossbeam		

Please refer to the series code to select the type and parameters for ordering.

Drag Chain

Code	Type	Feature	Inside height	Crossbeam ❶	Cable placement form	Number of cavities	Material	Color	Allowable temperature	Flame retardant grade	Accessories
BKLR-Q	General use	Reinforced	20	Bridge	Inner and outer diameter open	Single cavity	Engineering plastic	Black	-20°C~80°C	UL94-V0	Joint
BKLR-B				Fully closed							

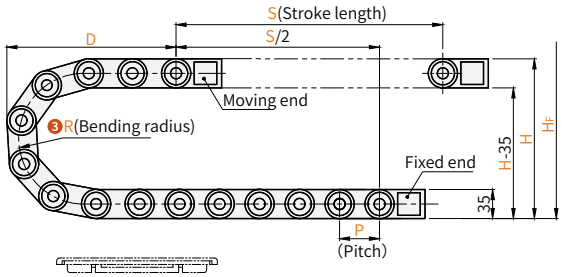

- H =Theoretical installation height
- HF =Actual installation height
- D = Minimum distance when the drag chain is returned to the limit position
- K = π · R +Safety amount



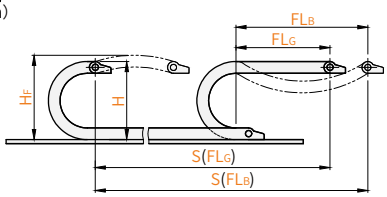

- Overhead length
- FLG=Straight overhead length
- FLB=Safety collapsed waist overhead length

Visual standards: first perspective

22 links per meter of chain.

Model Code	Inner width F ❷	Bending radius R ❸	Number of links N ❹	Joint ❺	Installation size H	D	K	Actual installation height HF	Outer width E	Pitch P	Max. cable diameter	Max. overhead length (m)	Max. allowable stroke (m)	Max. permissible vertical suspension (m)
BKLR-Q / BKLR-B		(55)	1~	BKTR	145	120	290	175		46	17	1	60	25
	38	75			185	140	350	215	56					
		100			235	165	430	265						
		(55)			145	120	290	175						
	50	75			185	140	350	215	68					
		100			235	165	430	265						
		(55)			145	120	290	175						
	60	75			185	140	350	215	78					
		100			235	165	430	265						
		(55)			145	120	290	175						
	75	75			185	140	350	215	93					
		100			235	165	430	265						

BKLR-B has no ( ) internal specifications.

Joint

Code	Type	Feature	Inside height	Material	Color	Allowable temperature	Flame retardant grade
BKTR	General use	Reinforced	20	Engineering plastic	Black	-20°C~80°C	UL94-V0

Model Code	Inner width F ❷
BKTR	38
	50
	60
	75

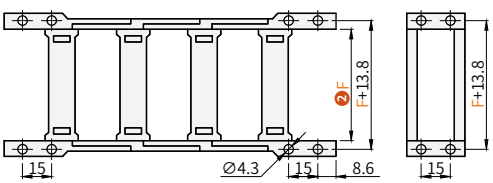

Visual standards: first perspective

Shim

Code	Type	Feature	Inside height	Crossbeam ❶	Material	Color	Allowable temperature	Flame retardant grade	Applicable drag chain code
BKFR-Q	General use	Reinforced	20	Bridge	Engineering plastic	Black	-20°C~80°C	UL94-V0	BKLR-Q
BKFR-B				Fully closed					BKLR-B

Bridge
BKFR-Q



Fully closed
BKFR-B



Visual standards: first perspective