Order guide

B (Major category) KL (Category) K (Series) - F15 (1 Inner Width) - R28 (2 Bending Radius) - N10 (3 Number of Links) - BKTK (4 Joint)

◉Please refer to the series code to select the type and parameters for ordering.

○ Cable Carrier

Code	Type	Cable Carrier Inner Height	Crossbar	Cable Insertion Method	Number of Cavities
BKLK	General Use	15	Semi-Enclosed	Inner Diameter Open	Single Cavity

Code	Material	Color	Allowable Temperature	Flame Retardant Rating	Accessories
BKLK	Engineering Plastic	Black	-20°C~80°C	UL94-V0	Joint

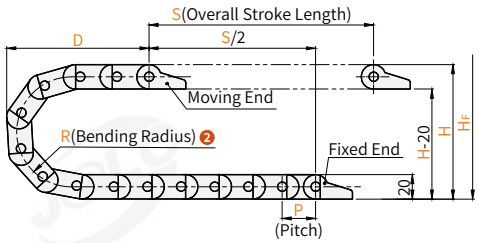

- H = Theoretical Mounting Height
- H_F = Actual Mounting Height
- D = Min. Distance at Retracted Position
- K = π·R + Safety Margin



◉This product offers 4 assembly methods that can be freely combined, meeting the requirements of various installation scenarios.



◉Unsupported Length
- FL_G=Straight Unsupported Length
- FL_B=Safe Sagging Unsupported Length



◉Joint Installation Method: Choose Hole Type on Mobile End (External Link)



Pin-Fixed End (Internal Link)



Visual standards: first perspective

◉For inner width 15 mm, number of links per meter: 40; for inner widths 20 / 30 / 40 / 50 mm, number of links per meter: 50;

Model		Bending Radius R 2	Number of Links N 3	Joint 4	Mounting Dimensions			Actual Mounting Height HF
Code	Inner Width F 1				H	D	K	
BKLK	15	28	1~	BKTK	76	63	150	96
		38			96	73	175	116
		48			116	83	225	136
	20	28			76	58	140	96
		38			96	68	160	116
		48			116	78	200	136
	30	28			76	58	140	96
		38			96	68	160	116
		48			116	78	200	136
	40	28			76	58	140	96
		38			96	68	160	116
		48			116	78	200	136
	50	28			76	58	140	96
		38			96	68	160	116
		48			116	78	200	136

Model		Outer Width E	Pitch P	Max. Cable Diameter	Max. Overhanging Load (kg/m)	Max. Overhang Length (m)
Code	Inner Width F [1]					
BKLK	15	25	25	12	0.81	1.5
	20	28.2	20		0.75	1.25
	30	38.2				
	40	48.2				
	50	58.2				

Joint

Code	Type	Cable Carrier Inner Height	Material	Color	Allowable Temperature	Flame Retardant Rating
BKTK	General Use	15	Engineering Plastic	Black	-20°C~80°C	UL94-V0

Suitable for Inner Width F15



Suitable for Inner Width F20



Suitable for Inner Width F30



Suitable for Inner Width F40



Suitable for Inner Width F50





Visual standards:
first perspective

Model	
Code	Inner Width F ❶
BKTK	15
	20
	30
	40
	50