Order guide

B (Major category) SB (Category) L (Series) - C2 (1 Material) - T1.4 (2 Thicknesses)

Please refer to the series code to select the type and parameters for ordering.

Order guide

B (Major category) SB (Category) M (Series) - 24 (1 Specification)

Please refer to the series code to select the type and parameters for ordering.

Positioning pin for linear guide

Code	Type	Material①	Surface treatment
BSBL-C2	Positioning pin for linear guide	S45C	Electroless nickel plating
BSBL-S1		SUS440C	—

Serial number	Part Name	Quantities
①	Main part	1
②	Seals	1
③	Gasket	1
④	Bolt	1

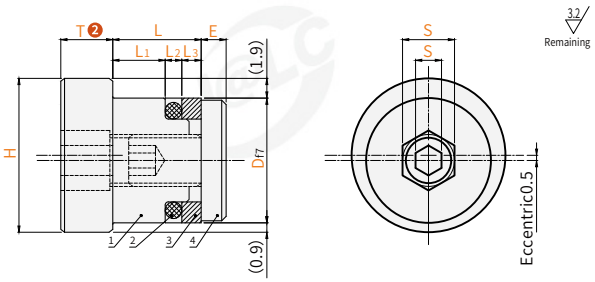



Visual standards: first perspective

How to use: turn the body right and then turn the bolt right.

Model Code	T②	H	Df7		L	E	L1	L2	L3	S	S1	Tightening torque N·cm	(Recommended) Compression force kN	Weight(g)
BSBL-C2 BSBL-S1	1.4	12.8	10	-0.013 -0.028	7.5	2.4	5	1.5	1.6	5	2.5	85	1.75	7
	1.8											110	2.4	
	3.5											180	3.7	8
	5	14.8	12	-0.016 -0.034	8.5		6					260	5.2	14

Anti-shedding stopper for linear guide

Code	Type	Material
BSBM	Anti-shedding stopper for linear guide	S45C

Specification: 24

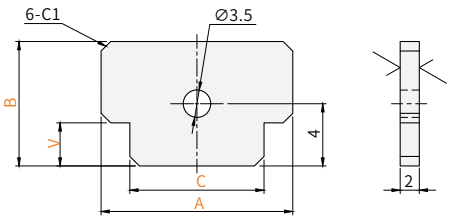

Specification: 28、33

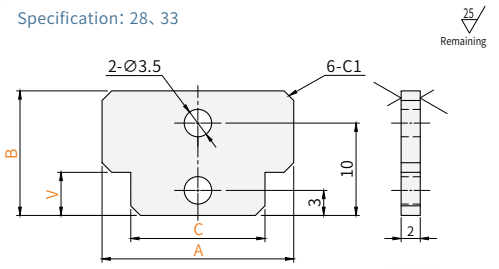



Visual standards: first perspective

Model Code	Specification	A	B	C	V
BSBM	24	20	13	14	4.5
	28	27	16	19	6
	33	30	20	22	7