

C FD J - C2 E1 - P - A15 - R1.1

Order guide: Major category Series Surface treatment Nominal diameter Fixed method Belt radius

Please refer to the series code to select the type and parameters for ordering.


Code	Shape	Fixed method	Main body		External thread		Bearing material
			Material	Surface treatment	Material	Surface treatment	
CFDJ-C2E1-P	U groove narrow type	Standard	S45C	Blackening			Bearing steel
CFDJ-C2N1-P				Electroless nickel plating			
CFDJ-A1H1-P				A5052	Natural color anodizing		
CFDJ-S1W-P		External thread	SUS304	—			Stainless steel
CFDJ-C2E1-Q			S45C	Blackening	S45C	Blackening	Bearing steel
CFDJ-C2N1-Q				Electroless nickel plating		Electroless nickel plating	
CFDJ-A1H1-Q		A5052	Natural color anodizing	SUS304	—	Stainless steel	
CFDJ-S1W-Q		SUS304	—			Stainless steel	




- If rust resistance is required, please give preference to stainless steel or electroless nickel-plated products.
- Bearings are bonded.
- Externally threaded section pins are riveted.

- Bearing precision: GB/T 307.1 Grade 0
Equivalent: JIS B 1514 Grade 0

Standard type
CFDJ-C2E1/C2N1/A1H1/S1W-P

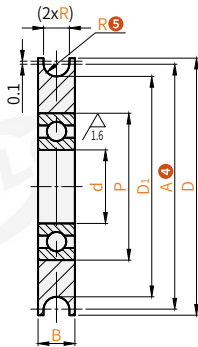

External thread type
CFDJ-C2E1/C2N1/A1H1/S1W-Q

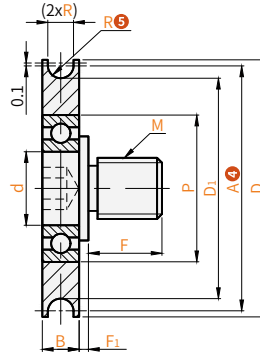

6.3

Remaining



Visual standards:
first perspective

Model	R5	F	d	P	D	D1	B	Standard bearing	M	G	F1	Applicable round belt radius				
Standard type CFDJ-C2E1-P CFDJ-C2N1-P CFDJ-A1H1-P CFDJ-S1W-P	(15)	1.1	4	11	16.9	13	4	BCTC-M1-P-694ZZ				2				
	(20)			13	20.9	18		BCTC-M1-P-624ZZ								
	(30)			5	16	31.9		28					BCTC-M1-P-625ZZ			
	(20)	1.6	—	4	13	21.9	17	5	BCTC-M1-P-624ZZ				3			
	(23)				16	24.9	20		BCTC-M1-P-625ZZ							
	(30)				5	31.9	27		BCTC-M1-P-625ZZ							
	(18)	2.1	8	6	11	19.9	14	6	BCTC-M1-P-685ZZ	M6	3	1.0	4			
	23				15	24.9	19		BCTC-M1-P-696ZZ							
	28				19	29.9	24		BCTC-M1-P-626ZZ							
	30				8	31.9	26		BCTC-M1-P-698ZZ							
	40				12	41.9	36		BCTH-M1-P-6901ZZ					M10	6	1.5
	48				6	49.9	44		BCTC-M1-P-626ZZ					M6	3	
External thread type CFDJ-C2E1-Q CFDJ-C2N1-Q CFDJ-A1H1-Q	40	2.6	8	8	19	41.9	35	BCTC-M1-P-698ZZ	M6	4	1.0	5				
	48				49.9	43	BCTC-M1-P-698ZZ	M6	4							
	50				12	51.9	45	BCTH-M1-P-6901ZZ	M10	6	1.5					
	38	3.1	10	8	24	39.9	32	BCTC-M1-P-628ZZ	M8	4	1.0					
	48				49.9	42	BCTC-M1-P-628ZZ	M8	4							
	50				12	51.9	44	BCTH-M1-P-6901ZZ	M10	6	1.5					
	60	4.1	12	12	28	61.9	54	BCTH-M1-P-6001ZZ				6				
	100				20	101.9	94	BCTH-M1-P-6904ZZ								
	50				12	51.9	42	BCTH-M1-P-6201ZZ	M10	6	1.5	8				
	60	5.1	20	42	50	61.9	50									
80	81.9				70	BCTH-M1-P-6004ZZ										
(140)	141.9				130						10					

○ Dimensions with () do not apply to the external thread type.