Order guide: C (Major category) WX (Category) M (Series) - S6 (1 Body material) - 7.5 (2 SPEC)
Please refer to the series code to select the type and parameters for ordering.

Order guide: C (Major category) WX (Category) N (Series) - A (3 Feature) - 14 (2 SPEC)
Please refer to the series code to select the type and parameters for ordering.

Standard type

Code	Mounting type	Feature	Body/ Adjustment ring material	Ball		Sub-ball	
				Material ❶	Hardness	Material	Hardness
CWXM-S6	Press-in	Standard	SUS304	SUS440C	HRC55~	SUS440C	HRC55~
CWXM-P12				POM	—		



Visual standards: first perspective

Model		D	D1	H	h1	h2	d	Load resistance N(kgf)	
Code	Specification ❷							CWXM-S6	CWXM-P12
CWXM-S6 CWXM-P12	7.5	9	7.5	6.1	1.1	4	4	12(1.2)	6(0.6)
	9	11	9	7.2	1.2	5	4.76	14(1.4)	7(0.7)
	11	13	11	8.5	1.5	6	5.56	41(4.2)	27(2.8)
	15	17	15	12.5	2.5	9	8.73	55(5.6)	34(3.5)
	18	20	18	14.5	3.5	10	10.32	62(6.3)	55(5.6)
	24	26	24	20.8	5.3	14	15.87	343(35)	69(7)
	30	32	30	25.3	6.3	17	19.05	412(42)	82(8.4)

Pin plunger/Pin plunger threaded type

Code	Mounting type	Feature ❸	Material					
			Main body	Adjustment ring	Steel ball	Housing	Retaining ring	Spring
CWXN-A	Press-in	Pin plunger type	SUS304	SUS304	SUS440C (HRC55~)	SUS304	SUS304	SUS631J1
CWXN-B		Pin plunger threaded type						

Pin plunger type
CWXN-A

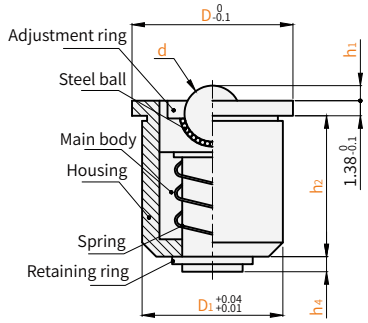

Pin plunger threaded type
CWXN-B

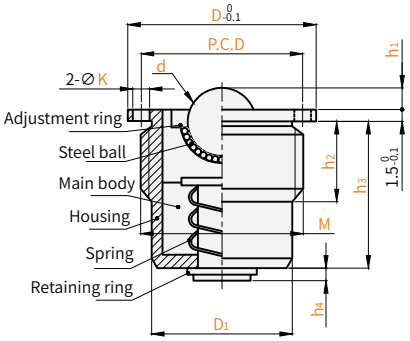

Visual standards: first perspective

Pin plunger type

Model		D	D1	h1	h2	h4	d	Load resistance N(kgf)	
Code	Specification ❷							min	max
CWXN-A	14	16	14	1.5	14	1.5	5.56	23(2.3)	30(3.0)
	18	20	18	2.5	17	2	8.73	24(2.4)	38(3.8)
	22	24	22	3.5	21.5		10.32	24(2.4)	55(5.6)

Pin plunger threaded type

Model		D	D1	h1	h2	h3	h4	d	M (Fine threa)	K	P.C.D	Load resistance N(kgf)	
Code	Specification ❷											min	max
CWXN-B	16	19	13.5	1.5	9	14	1.5	5.56	M16x1.5	2	15.4	23(2.3)	30(3.0)
	20	24	16.5	2.5	10	17	2	8.73	M20x1.5	2	18.5	24(2.4)	38(3.8)
	24	28	20.5	3.5	12	21.5		10.32	M24x1.5	2.5	24	24(2.4)	55(5.6)