Order guide

C (Major category) XK (Category) E (Series) - E (1 Mounting hole type) - d8 (2 Inner diameter)

◉ Please refer to the series code to select the type and parameters for ordering.

○ Single section

Code	Type	Segments	Mounting holes type 1	Body material	Heat treatment
CXKE-E	Quick locking	Single section	One end round hole and one end keyway type	SCR400	Tempering
CXKE-G			One end round hole and one end hexagonal hole type		

Customization design A

One end round hole One end keyway
CXKE-E

One end round hole One end hexagonal hole
CXKE-G

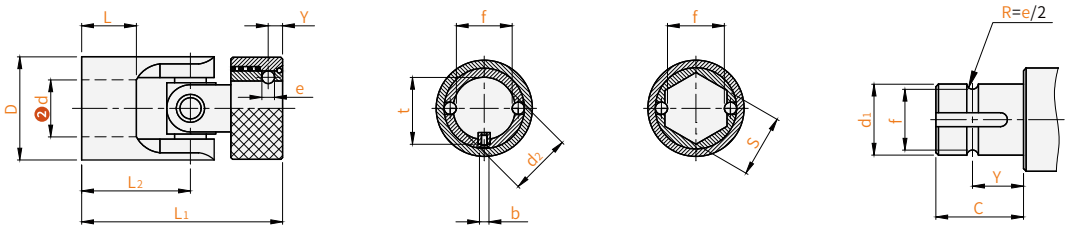

◉ Single-section universal joint with quick-lock (detachable).
◉ Maximum rotation angle of 30° per section.
◉ The relationship between speed, torque, and angle when the universal joint is in operation is one of mutual influence.

Visual standards: first perspective

Model Code	dH7 2	d1/d2	D	L1	L2	C	Y	e	f -0.1 -0.3	bJS9	t	SH8
CXKE-E CXKE-G	8	8	16	38	18	10	4	4	6.56	3	9.4	8
	10	10	20	42	21	12			9.06	4	11.8	10
	12	12	23	52	26	15	7.5	4.8	10.48		13.8	12
	14	14	25	59	29.5	17	8.5	5.5	11.88	5	16.3	14
	16	16	32	86	43	24	14.0	6.35	14.8		18.3	16
	18	18	36	96	48	28	19.0	8	16		20.8	18
	20	20	42	108	54	31	19.0		18	6	22.8	20