Order guide

D (Major category) HG (Category) P (Series) - P (2 Features) - L203.2 (1 Slide Length)

◉ Please refer to the series code to select the type and parameters for ordering.

○ Two-Section · SPCC

Code	Number of Sections	Features	Width	Material	Surface Treatment
DHGN	Two-Section	3/4 Extension	27	SPCC	Eco-Friendly Blue-White Zinc Plating

◉ Inner rail non-removable, both ends without end stops.
◉ Note: When installed horizontally, the load capacity decreases to approximately ⩽25% of the rated value.
◉ Use M4 pan head screws or small clamping screws for mounting the slide rails.

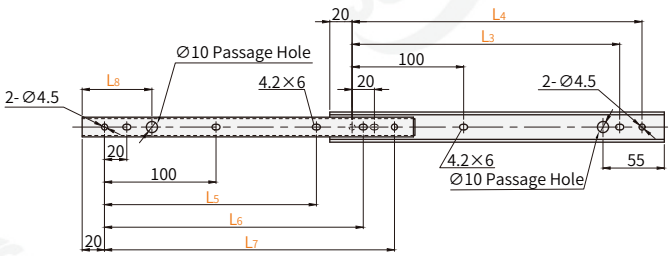

Open State

Closed State



Visual standards: first perspective

Model		L1(Slide Stroke)	L3	L4	L5	L6
Code	L (Slide Length) 2					
DHGN	200	135	140	160	—	140
	250	185	190	210	150	190
	300	222	240	260	190	240
	350	260	290	310	225	290
	400	297	340	360	265	340
	450	334	390	410	300	390
	500	371	440	460	337	440

Model		L7	L8	Load (Per Pair)	Ref.Weight(kg/pcs)
Code	L (Slide Length) 2				
DHGN	200	160		26kgf	0.29
	250	210		24kgf	0.37
	300	260	62.5	23kgf	0.45
	350	310		21kgf	0.53
	400	360		20kgf	0.61
	450	410	142.5	18kgf	0.69
	500	460		17kgf	0.77

Two-Section · SUS304

Code	Number of Sections	Features ❶	Width	Material	Surface Treatment
DHGP-P	Two-Section	Standard Type	27	SUS304	—
DHGP-K		Normally Open Latching Type			

Features:
- Simple retention at full extension.
- Inner rail non-removable.

Normally Open Latching Type
- Applying a force of 0.5kg (reference value) in the retraction direction releases the hold.
- When the slide rail is fully extended, the protrusion engages the leaf spring, providing simple retention in the retraction direction.
- Very convenient for operation when the extended section is open.
- When using the linear slide in vertical or inclined positions, please install an external mechanism to prevent the slide from falling out.

Note:
- When installed horizontally, the load capacity decreases to approximately ⩽25% of the rated value.
- Use M4 hex socket pan head bolts or pan head screws to mount the slide rails.

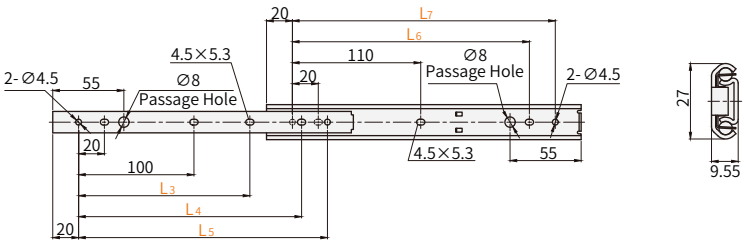

Open State

Closed State



Visual standards: first perspective

Model		L1(Slide Stroke)	L3	L4	L5
Code	L (Slide Length) ❷				
Standard Type DHGP-P Normally Open Latching DHGP-K	203.2	136.1	—	143.2	163.2
	254	186.9	154	194	214
	304.8	225	194.8	244.8	264.8
	355.6	263.1	230.6	295.6	315.6
	406.4	301.2	271.4	346.4	366.4
	457.2	339.3	307.2	397.2	417.2
	508	377.4	345	448	468

Model		L6	L7	Load (Per Pair)	Ref.Weight(kg/pcs)
Code	L (Slide Length) ❷				
Standard Type DHGP-P Normally Open Latching DHGP-K	203.2	143.2	163.2	26kgf	0.18
	254	194	214	24kgf	0.22
	304.8	244.8	264.8		0.26
	355.6	295.6	315.6	23kgf	0.30
	406.4	346.4	366.4	21kgf	0.34
	457.2	397.2	417.2	20kgf	0.38
	508	448	468	18kgf	0.42