Order guide

D (Major category) SB (Category) C (Series) - D (1 Surface Treatment) - W2 (2 Mounting Method) - M6 (3 Thread Specification)

Please refer to the series code to select the type and parameters for ordering.

Ext. Thd. Mount

Code	Mounting Method	Body		Mounting	
		Material	Color	Material	Surface Treatment
DSBA	Ext. Thd. Mount	PF	Black	Q235	Galvanized

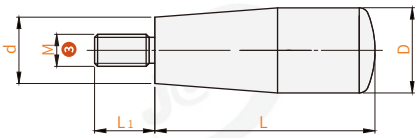

Visual standards: first perspective

Model		L	L1	D	d	Ref. weight(kg/pcs)
Code	M 3					
DSBA	6	50	12	16.1	12	0.03
	8	63	14	18.1	14	0.06
	10	80	16	26.1	20	0.08
	12	100	18	28.1	22	0.12

Wrench-Slot Type · External Thread Mount

Code	Mounting Method	Body		Mounting	
		Material	Surface Treatment	Material	Surface Treatment
DSBB	Ext. Thd. Mount	SUS304	Electropolished	SUS304	Electropolished

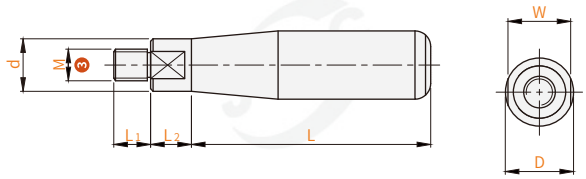

Visual standards: first perspective

Model		L	L1	L2	D	d	W	Ref. weight(kg/pcs)
Code	M 3							
DSBB	5	39	6	6	10	8	6.5	0.026
	6	50	7	7	13	10	8	0.056
	8	60	8	8	16	13	10	0.101
	10	70	10	10	20	16	12	0.181

External Thread Stepped Type / Internal Thread Mount

Code	Mounting Method ❷	Body		Mounting	
		Material	Color	Material	Surface Treatment ❶
DSBC-D-W2	External Thread Mount Stepped Type	PF	Black	SUM24L	Galvanized
DSBC-W-W2				SUS303	—
DSBC-W-N1	Internal Thread Mount			—	—

External Thread Mount Stepped Type
DSBC-D-W2
DSBC-W-W2

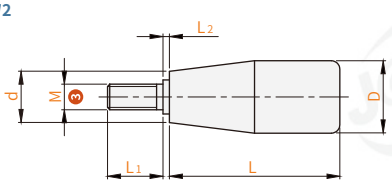

Internal Thread Mount
DSBC-W-N1





Visual standards: first perspective

Model		L	L1	L2	h	h1	D	d	d1	Ref. weight(kg/pcs)	
Code	M ❸									DSBC-D/W-W2	DSBC-W-N1
DSBC-D-W2	6	40	13	1.5	1.8	20	17.1	12	6.5	0.017	0.011
DSBC-W-W2	8	50	16	2	4.5	26	21.1	17	8.5	0.033	0.201
DSBC-W-N1	10	65	20		5	33	25.1	20	10.5	0.062	0.038
	12	85	25	2.5		40	28.1	21	12.5	0.101	0.062