


E KL L - H - M3 L5
 Major category Series Thread Length
 Order guide Category Blockcolor Length
 Please refer to the series code to select the type and parameters for ordering.

E KL M - H - L5
 Major category Series Length Thread
 Order guide Category Thread Length
 Please refer to the series code to select the type and parameters for ordering.

| Code | Appearance feature | Block shape | Tail shape | Thread | Main body | | | Block | | | Accessories (1 hexagonal nut) | |
|--------|--------------------|-----------------|----------------|--------------|-----------|-------------------|----------------|--------------|---------|-----------|-------------------------------|-------------------|
| | | | | | Material | ST | Strength Grade | Material | Color ② | Hardness | Material | S T |
| EKLL-H | Adjustable | Large flat head | Hexagonal hole | Coarse teeth | SCM435 | Glossy galvanized | 10.9 | Polyurethane | Black | Shore A90 | SS400 | Glossy galvanized |
| EKLL-L | | | | | | | | | Blue | Shore A70 | | |


- The block is adopted bonding process.
- It is suitable for supporting large workpieces.

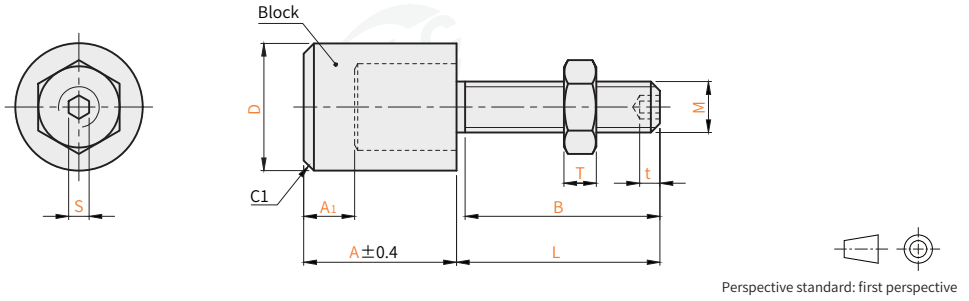

| Model | | L ④ | B | A | A ₁ | D | S | T | t |
|--------|-----|-------------------|-------------|----|----------------|------|-----|-----|-----|
| Code | M ③ | | | | | | | | |
| EKLL-H | 3 | 10 15 | Full thread | 14 | 4 | 7.5 | 1.5 | 2.4 | 1.8 |
| | 4 | 10 15 20 25 30 | | | | | | | |
| EKLL-L | 5 | 15 20 25 30 40 | Full thread | 15 | 5 | 12.5 | 2.5 | 4.5 | 2.8 |
| | 6 | 15 20 25 30 40 50 | Full thread | | | | | | |
| | 8 | 25 30 40 50 60 | Full thread | | | | | | |
| | 10 | 30 40 50 60 70 | Full thread | 16 | 6 | 20 | 4 | 6.5 | 4 |

| Code | Appearance feature | Block shape | Tail shape | Thread | Main body | | | Block | | | Accessories (1 hexagonal nut) | |
|------|--------------------|-----------------|-------------|--------------|-----------|----|----------------------|-------|-----------|----------|-------------------------------|--|
| | | | | | Material | ST | Material | Color | Hardness | Material | ST | |
| EKLM | Adjustable | Large flat head | Wrench slot | Coarse teeth | SUS304 | — | Lowelasticity rubber | Black | Shore A57 | SUS304 | — | |

- The block is adopted bonding process.
- It is suitable for supporting large workpieces.

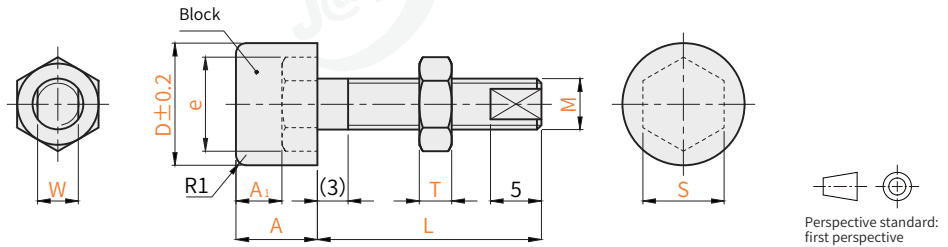

| Model | | L ④ | D | e | S | A | A ₁ | T | W | Shock absorption (kgf.cm) | Load resistance (kgf) |
|-------|-----|-------------|----|------|-----|----|----------------|-----|-----|---------------------------|-----------------------|
| Code | M ③ | | | | | | | | | | |
| EKLM | 3 | 10 15 20 | 8 | 6.15 | 5.5 | 6 | 4 | 2.4 | 2 | 0.045 | 2.2 |
| | 4 | 10 15 20 30 | 10 | 7.7 | 7 | 7 | 4.2 | 3.2 | 3 | 0.069 | 3.4 |
| | 5 | 20 30 40 | 12 | 8.8 | 8 | 8 | 4.5 | 4.5 | 4 | 0.112 | 5.4 |
| | 6 | 20 30 40 | 15 | 11.1 | 10 | 9 | 5 | 5 | 4.5 | 0.207 | 9.4 |
| | 8 | 30 40 50 | 18 | 14.4 | 13 | 11 | 5.7 | 6.5 | 6.5 | 0.35 | 14.2 |
| | 10 | 30 40 50 | 21 | 17.8 | 16 | 12 | 5.6 | 8 | 8 | 0.517 | 23.4 |

Screw with block