


E (Major category)
 MJ (Category)
 M (Series)
 S1W - M2 (Material)
 2 (Thread)

Order guide: Please refer to the series code to select the type and parameters for ordering.

Code	Thread	Standard	Material ①	ST
EMJM-S1W	Coarse teeth	PEM Industry Standard	SUS304	—
EMJM-CD			Carbon steel	Galvanized

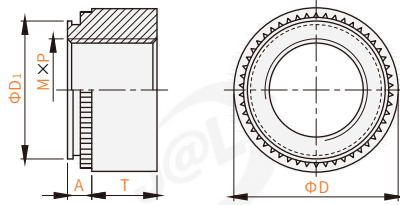

○ SUS304

Code	Model		Mounting plate thickness	P Pitch	A	Mounting plate aperture +0.08	D	D ₁	T	Minimum distance from center of hole to edge of mounting plate
	M ②									
EMJM-S1W	2.5	0.8	0.77	0.45	0.97	4.22	6.3	4.2	1.5	4.8
		1	0.97							
	3	1.4	1.38	0.5	0.77	6.35	8.7	6.33	2	7.1
		1	0.97							
		1.4	1.38							
		0.8	0.77							
	3.5	1	0.97	0.6	0.77	4.75	7.1	4.73	2	5.6
		0.8	0.77							
	4	1	0.97	0.7	0.97	5.41	7.9	5.38	2	6.9
		1.4	1.38							
		0.8	0.77							
	5	1	0.97	0.8	0.97	6.35	8.7	6.33	2	7.1
		1.4	1.38							
	6	1.2	1.15	1.0	1.15	8.75	11.05	8.72	4.08	8.6
		1.4	1.38							
		2.3	2.21							
	8	1.4	1.38	1.25	1.38	10.5	12.65	10.47	5.47	9.7
		2.3	2.21							
	10	2.3	2.21	1.5	2.21	14	17.35	13.97	7.48	13.5
		3.2	3.05							

○ Carbon steel

Code	Model		Mounting plate thickness	P Pitch	A	Mounting plate aperture +0.08	D	D ₁	T	Minimum distance from center of hole to edge of mounting plate
	M ②									
EMJM-CD	2	1	0.97	0.4	0.97	4.22	6.3	4.2	1.5	4.8
		1.4	1.38							
	2.5	1	0.97	0.45	0.97	6.35	8.7	6.33	2	7.1
		1.4	1.38							
	3	0.8	0.77	0.5	0.97	8.75	11.05	8.72	4.08	8.6
		1	0.97							
	3.5	1.4	1.38	0.6	1.38	10.5	12.65	10.47	5.47	9.7
		0.8	0.77							
		1	0.97							
	4	1	0.97	0.7	0.97	12.65	14.65	12.65	5.47	9.7
		1.4	1.38							
	5	0.8	0.77	0.8	0.97	14.65	18.65	16.65	5.47	9.7
		1.4	1.38							
		1	0.89							
	6	1.2	1.15	1.0	1.15	18.65	22.65	18.65	5.47	9.7
		1.4	1.38							
	8	2.3	2.21	1.25	1.38	22.65	28.65	22.65	5.47	9.7
		1.4	1.38							
		2.3	2.21							
	10	2.3	2.21	1.5	2.21	28.65	36.65	28.65	5.47	9.7
3.2		3.05								

Rivet