
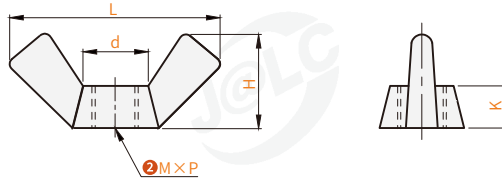

E Major category | **ML** Series | **E - C2** Series | **M4** Thread specification
 Order guide | category | Material | 2 Thread specification
 Please refer to the series code to select the type and parameters for ordering.


E Major category | **ML** Series | **F - C6** Series | **D24** Diameter
 Order guide | Category | Material | 3 Diameter
 Please refer to the series code to select the type and parameters for ordering.

Butterflynut

Code	Type	Material ¹	ST
EMLE-C2	Butterfly nut	S45C	Galvanized
EMLE-S1		SUS304	—




Applicable standards: DIN 1587-1987



Model		Pitch P	d	K	L	H
Code	M ²					
EMLE-C2 EMLE-S1	4	0.7	5.5	3.2	21	11
	5	0.8	7.5	4.0	21	11
	6	1.0	9	5.0	27	13
	8	1.25	10.5	6.5	31	16
	10	1.5	14	8	36	18
	12	1.75	17	10	48	23

Lock nut

Code	Type	Material ¹	ST
EMLF-C6	Lock nut	SUM22L	Blackened
EMLF-S3		SUS303	—

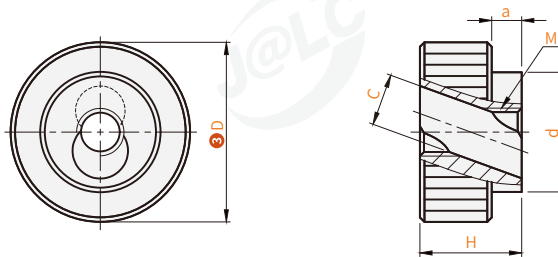

Model		M	H	a	d	C	Ref. tightening torque N·m
Code	D ³						
EMLF-C6	24	M6	14	4	16	6.7	4.8
	30	M8	17	5	20	8.7	9
EMLF-S3	36	M10	20	6	28	11	17.5
	40	M12	24	8	32	13.7	