


E SL B - S1 - M5 - L8
 Order guide: Major category (E), Series (SL), Material (B), Thread (S1), Length (L8)
 ① Material ② Thread ③ Length
 Please refer to the series code to select the type and parameters for ordering.

Code	Thread	Material ①	ST	Strength Grade	Applicable standard
ESLB-J2	Full/Half teeth	SCM435	Blackened	10.9	GB/T 5789-1986
ESLB-S1	Full teeth	SUS304	—	—	

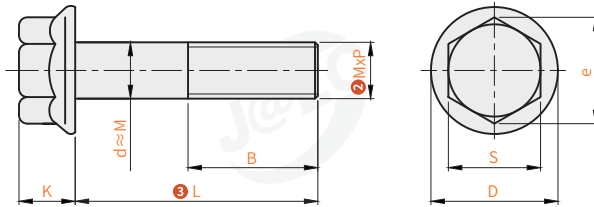

Perspective standard:
 first perspective

○ Full/Half teeth

Model Code	M ②	L ③	B	P Pitch	S	K	e	D
ESLB-J2	6	12 16 20 25	Full teeth 23	1.0	10	6.6	10.8	14.2
		30 35 40 45 50 55 60	Full teeth 26					
	8	16 20 25 30	Full teeth 26	1.25	13	8.1	14.08	18
		35 40 45 50 55 60 65 70 80	Full teeth 26					
	10	25 30 35	Full teeth 26	1.5	15	9.2	16.32	22.3
		40 45 50 55 60 65 70 80 90 100	Full teeth 30					
	12	25 30 35 40 45 50	Full teeth 30	1.75	18	10.4	19.68	26.6
		55 60 65 70 80 90 100	Full teeth 34					
14	30 35 40 45 50	Full teeth 34	2.0	21	12.4	22.58	30.5	
	55 60 65 70 80 90 100	Full teeth 38						
16	35 40 45 50 55	Full teeth 38	2.0	24	14.1	25.94	35	
	60 65 70 80 90 100 110 120 130 140 150	Full teeth 38						
20	40 45 50 55 60 65	Full teeth 38	2.5	30	17.7	32.66	45	
	70 80 90 100 110 120 130 140 150	Full teeth 38						

○ Full teeth

Model Code	M ②	L ③	B	P Pitch	S	K	e	D
ESLB-S1	5	6 8 10 12 14 16 20 25 30 35 40	Full teeth	0.8	8	5.4	8.56	11.8
	6	8 10 12 14 16 18 20 25 30 35 40 45 50 55 60		1.0	10	6.8		13.6
	8	10 12 16 18 20 25 30 35 40 45 50 55 60 65 70		1.25	13	8.5	10.8	17
	10	16 20 25 30 35 40 45 50 55 60 65		1.5	15	9.7	14.08	20.8
	12	20 25 30 35 40 45 50 55 60		1.75	18	11.9	16.32	24.7

Bolt