


Order guide: **G** Major category, **SH L** Series, **K6** - **1** - **1**

Category: **1** Interface type, **2** Ball head end nominal model, **3** Fixed end nominal model


Please refer to the series code to select the type and parameters for ordering.

Code	Interface type 1	Material	Max. operating pressure	Max. operating temperature	Recommended fluid
GSHL-K6	Internal and external thread	SUS316	7Bar	200°C	Air, water
GSHL-K1	Internal thread				

Internal and external thread type
GSHL-K6

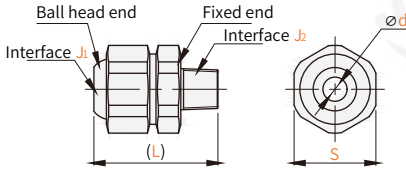

Internal thread type
GSHL-K1

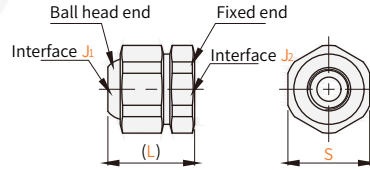

Perspective standard:
first perspective

Code	Model		J ₁	J ₂	(L)	S	d	Weight (g)
	Ball head end nominal model 2	Fixed end nominal model 3						
GSHL-K6	1	1	PT1/8	PT1/8	32	22	5.5	80
	2	2	PT1/4	PT1/4	36	29	8	90
	3	3	PT1/4	PT3/8	41	29	8	170
GSHL-K1	1	1	PT3/8	PT3/8	43	35	11	190
	2	2	PT3/8	PT3/8	49	35	11	290
	1	1	PT1/8	PT1/8	24	22	-	65
	2	2	PT1/8	PT1/4	24	22	-	65
	2	3	PT1/4	PT1/4	30	29	-	140
	3	3	PT1/4	PT3/8	30	29	-	140
	3	3	PT3/8	PT3/8	35	35	-	240