

H GY F - 1005
 Major category | Category | Specification



Order guide

Please refer to the series code to select the type and parameters for ordering.

Model	Mounting type	Rubber body material	Rubber hardness	Metal material	Surface treatment
HGYF	Gasket	EPDM rubber	Shore A65	S45C	Galvanized

Features

Wide variety of specifications and load resistance
 RoHS compliant rubber foot pad.

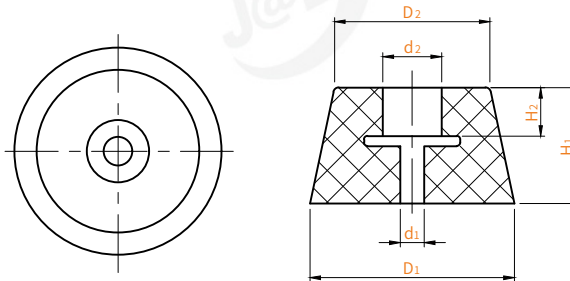

Acoustic Insulation and Shockproof

Model	Specification	Size (mm)						Recommend screw size	Load (kg)	Deflection (mm)	Net weight (g)
		H1	H2	D1	D2	d1	d2				
HGYF	1005	5	3	10	10	3	5	M3	10	1	0.5
	1209	9	4	12	8	3	5	M3	6	2	1
	1508	8	5	15	14	3	6	M3	15	2	2
	1510	10	3	15	10	3	5	M3	11	2	2
	1610	10	5	16	14	3	6	M3	15	2	3
	1811	11	7	18	15	4	7	M4	15	2	4
	2012	12	7	20	16	4	7	M4	20	2.5	5
	2017	17	8	20	15	3	7	M3	10	1	6
	2224	24	10	22	18	3	7	M3	10	1	12
	2314	14	5	23	19	4	8	M4	25	2.3	8
	2320	20	10	23	20	4	8	M4	10	1	11
	2410	10	5	24	19	4	9	M4	20	2	6
	2615	15	10	26	20	4	10	M4	30	3	10
	2818	18	11	28	22	4	12	M4	30	4	12
	2915	15	10	29	24	4	14	M4	30	3	12
	3019	19	10	30	24	4	14	M4	30	3.5	15
	3215	15	5	32	26	5	14	M5	45	2.4	15
	3220	20	10	32	26	5	15	M5	50	2.3	20
	3225	25	9	32	28	5	14	M5	50	4.3	28
	3418	18	10	34	26	5	17	M5	40	4	18
3617	17	9	36	20	6	17	M6	15	1	21	
3622	22	12	36	30	5	12	M5	60	3.5	28	
3824	24	13	38	32	5	12	M5	100	4	35	
4022	22	9	40	28	5	14	M5	70	3	30	
4527	27	12	45	35	5	12	M5	100	3	52	
6326	26	15	63	48	7	14	M6	40	1	103	