Order guide

C (Major category) - FD (Category) S (Series) - C2 (1 Material) - E1 (2 Surface Treatment) - d3 (3 Inner Diameter) - L4 (4 Width)

Please refer to the series code to select the type and parameters for ordering.

Code	Type	Shape	Material ❶	Surface Treatment ❷
CFDS-C2E1	Idler Pulley Shaft	Hex Socket Screw Type	S45C	Blackened
CFDS-C2N1			S45C	Electroless Nickel Plating
CFDS-S1W			SUS304	—

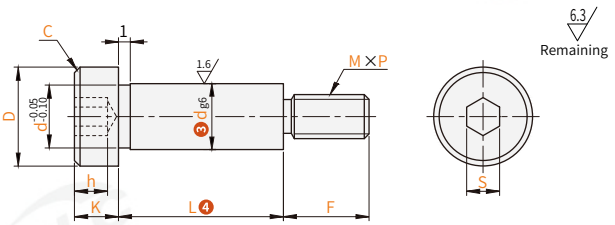

Usage Example

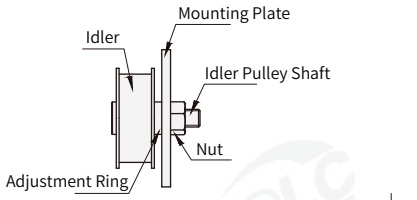

Visual standards: first perspective

Model			L ❹	D	h	K	F	M	P (Pitch)	C	S
Code	d_{g6} ❸										
(S45C) CFDS-C2E1 CFDS-C2N1 (SUS304) CFDS-S1W	3	-0.002 -0.008	4 6 8 10 12	5.5	1.3	2	4	M2.5	0.45	0.5	2
	4		6 8 10 12 16	6.5	1.5	2.8					2.5
	5	-0.004 -0.012	6 8 10 12 16 20 25 30 32 36 38 40	8	1.7	3.5	6	M3	0.5		3
	6		8 10 12 16 20 25 30 32 36 38 40	9	2.5	4	8	M4	0.7		4
	8	-0.005 -0.014	10 12 16 20 25 30 32 36 38 40	11	3	5	10	M6	1.0		5
	10		20 25 30 32 36 38 40	14	4	6	12	M8	1.25	1	6
	12	-0.006 -0.017	20 25 30 32 36 38 40	16	5	7					8