

E Major category | **SL** Category | **G** Series | **M3** Nominal size | **L6** Length



Order guide: Please refer to the series code to select the type and parameters for ordering.

E Major category | **SL** Category | **H** Series | **M6** Nominal size | **L12** Length

Order guide: Please refer to the series code to select the type and parameters for ordering.

○ Cross recessed hexagon bolt with indentation



Code	Thread length	Thread	Material	Surface treatment	Standard No.
ESLG	Full thread	Coarse thread	SUS304	No	GB/T 29.2-1988

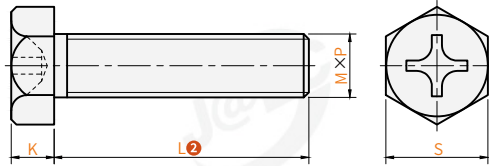

Model		L ²	P Pitch	K	S
Code	M ¹				
ESLG	3	6 8 10 12 14 16	0.5	2.2	5.5
	4	6 8 10 12 14 16 18 20 25 30 35 40 45 50	0.7	3	7
	5	8 10 12 14 16 20 25 30 35 40 45 50 55 60	0.8	3.7	8
	6	10 12 14 16 18 20 25 30 35 40 45 50 55 60 65 70 80	1	4.2	10
	8	12 16 18 20 25 35 40 45 50 55 60	1.25	5.5	13

○ Mushroom head square neck bolt

Code	Thread length	Thread	Material	Surface treatment	Standard No.
ESLH	Full thread	Coarse thread	SUS304	No	DIN 603-2017

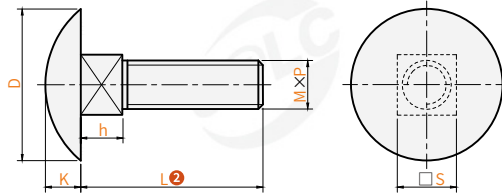

Model		L ²	P Pitch	D	K	h	S
Code	M ¹						
ESLH	6	12 16 18 20 25 30 35 40	1.0	16.55	3.88	4.6	6.48
	8	16 20 25 30 35 40 45 50 55 60 70 75 80 90	1.25	20.65	4.88	5.6	8.58
	10	20 25 30 35 40 45 50 55 60 70 80 90	1.5	24.65	5.38	6.6	10.58
	12	20 25 30 35 40 45 50 55 60 70 75 80 90	1.75	30.65	6.95	8.75	12.7

Bolt